



**ATLAS  
TAPES**


ATHENS  
68 Varis Avenue  
16673 Voula, Greece  
Tel.: +30 210 8995388

ATALANTI  
3rd km Skala Atalanti Road  
35200 Atalanti, Greece  
Tel.: +30 22330 23725

[www.atlas-tapes.gr](http://www.atlas-tapes.gr)  
[info@atlas-tapes.gr](mailto:info@atlas-tapes.gr)

## MASKING TAPE 6260

### TECHNICAL DATA SHEET

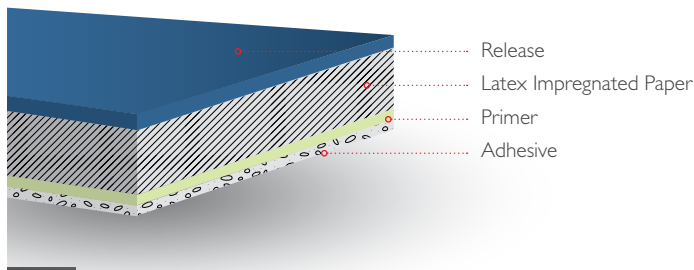

#### DESCRIPTION:

Saturated semi crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive. Recommended for 30 minutes 60°C oven use (tested and approved in 60 minutes use), and suitable for all general masking applications.

#### APPLICATIONS:

- Guaranteed spray painting automotive oven use in 60°C for 30 minutes.
- General masking
- Domestic DIY and Industrial general painting
- Holding
- Sealing
- Fixing
- Light duty packaging

#### PROPERTIES:

- 60°C oven use for 30 minutes.
- Suitable for both metallic and plastic automotive surfaces
- Residue free removal
- Excellent tape to tape adhesion
- Solvent and thinner resistant
- High initial tack
- Easy tear
- Excellent conformability
- Suitable for water and solvent based paints
- Easy curving
- Easy application on uneven surfaces

## ALL ABOUT TAPES



#### NOMINAL VALUES:

##### Backing

Impregnated Crepe Paper

##### Adhesive

Solvent-based, Natural Rubber

##### Tensile Strength MD

85 ± 20 (N/25mm)

TM 5004 by Afera

##### Elongation at Break MD

8 ± 2 (%)

TM 5004 by Afera

##### Adhesion to Steel

4 ± 1 (N/25mm)

TM 5001 by Afera

##### Rolling Ball Task

Under 3 (cm)

PSTC-6 (PSTC)

##### Paper thickness

90 ± 15 (mic)

##### Total thickness

110 ± 20 (mic)

##### Application Range

60°C for 30 minutes

##### Paper Colors

White  Sharp Yellow  Yellow  Brown 84

##### Adhesive Color

Transparent